


LSM TankCare® Disposable Standard Breathers

simple, dependable lubricant protection

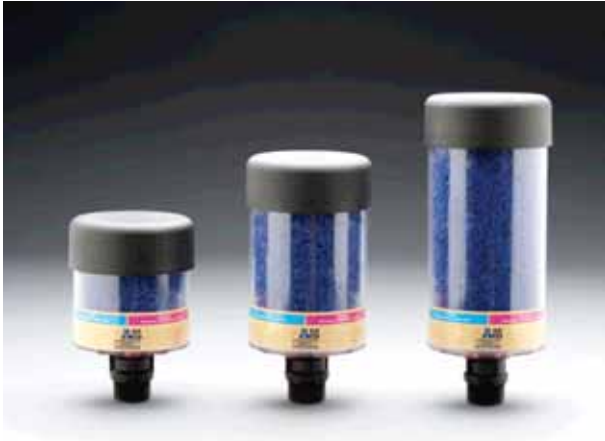

Model Number	LSM-2	LSM-3	LSM-4
Unit Height	6.125" / 155.6 mm	8.125" / 206.4 mm	10.125" / 257.2 mm
Diameter	4" / 101.6 mm	4" / 101.6 mm	4" / 101.6 mm
Shipping Weight (unit/case)	1 lb. 3 oz. / 9 lbs. 0.53 kg / 4.08 kg	1 lb. 12 oz. / 11 lbs. 8 oz. 0.79 kg / 5.22 kg	2 lbs. 7 oz. / 16 lbs. 1.1 kg / 7.26 kg
Amount of Silica Gel	11 oz. / 0.31 kg	1 lb. 4 oz. / 0.56 kg	1 lb. 14 oz. / 0.85 kg
Adsorption Capacity	0.13 L	0.23 L	0.35 L
Max. Flow Rate (cfm)	16 @ 1 PSID	16 @ 1 PSID	16 @ 1 PSID
(lpm)	453	453	453
Operating Temp. Range	-20°F to 200°F / -29°C to 93°C	-20°F to 200°F / -29°C to 93°C	-20°F to 200°F / -29°C to 93°C
Body Material	Nylon & Polycarbonate	Nylon & Polycarbonate	Nylon & Polycarbonate
Hydrophilic Agent	Silica Gel	Silica Gel	Silica Gel
Filter Media	Polyester	Polyester	Polyester
Connection Size	1" threaded	1" threaded	1" threaded

- Resilient clear polycarbonate body
- Bi-directional, controlled airflow
- Multi-tiered filtration process
- Water vapor adsorbent
- 3-micron absolute particulate filter elements
- Color indicator for easy system monitoring

